


別図第1 燃焼試験箱(第4条の3関係)

(その1)

で
(薄手布の場合)


(単位 ミリメートル)

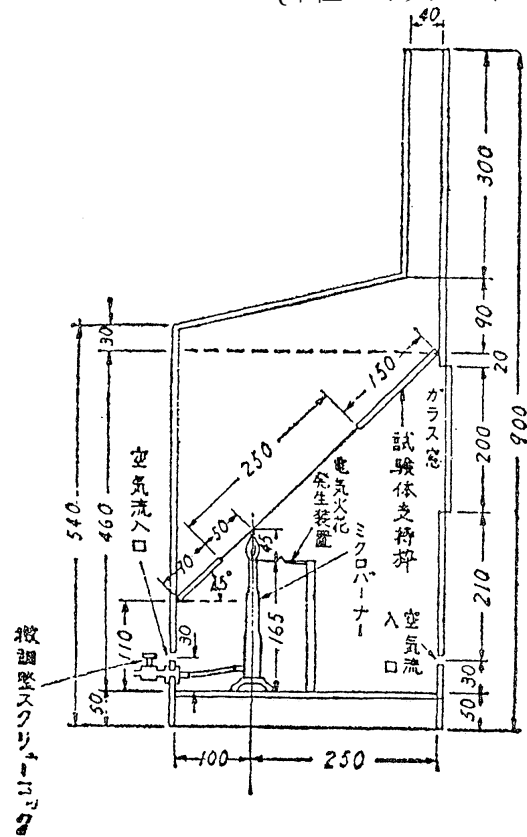

(その2)

で
(厚手布及び合板の場合)

(単位 ミリメートル)

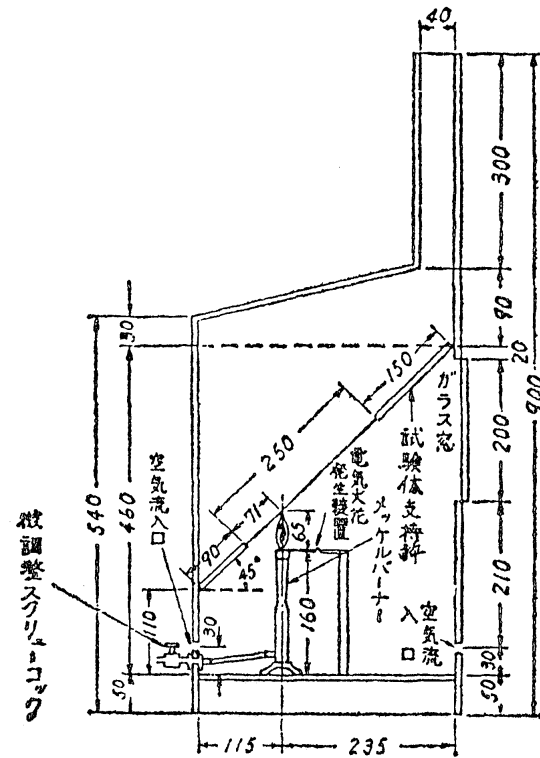

(じゅうたん等の場合)

正 面

Technical drawing of a window assembly. The drawing shows a cross-section of a window frame and glass unit. The glass unit is labeled "ガラス窓" (Glass Window) and has a width of 300. The frame has a total height of 540 and a total width of 350. The glass unit is 360 high and 300 wide. The frame has a top section 300 high and a bottom section 40 high. The frame is labeled "微調整スクリーン・コック" (Micro-adjustment screen cock) on the left side. The drawing includes various dimension lines and arrows indicating measurements.

側 面

Technical drawing of a window frame, showing front and side views with dimensions in millimeters.

Front View (Left):

- Overall height: 1000 mm
- Overall width: 250 mm
- Bottom section height: 80 mm
- Bottom section width: 250 mm
- Bottom section contains 6 circular holes, each with a diameter of $\phi 10$.
- Horizontal spacing between holes: 45, 40, 40, 40, 40, 45 mm.

Side View (Right):

- Overall height: 1000 mm
- Overall width: 250 mm
- Top section height: 200 mm
- Top section width: 180 mm
- Top section contains a rectangular window labeled "ガラス窓" (Glass Window).
- Bottom section height: 80 mm
- Bottom section width: 250 mm
- Bottom section contains 6 circular holes, each with a diameter of $\phi 10$.
- Horizontal spacing between holes: 45, 40, 40, 40, 40, 45 mm.
- Distance from top of bottom section to center of holes: 10 mm.

Labels:

- ガラス窓 (Glass Window)
- $\phi 10$ (Diameter 10 mm)
- ガス管用穴 (Gas Pipe Hole)